

# 0 601 9G4 204 – GDX 18V-200 C

|                                       |               |
|---------------------------------------|---------------|
| Material number                       | 0 601 9G4 204 |
| EAN                                   | 3165140951319 |
| 1/2 L-BOXX inlay for tool and charger | ✓             |
| 1 600 A01 CU5                         |               |
| Cardboard box                         | ✓             |



## Technical data

### Technical data


|                           |   |
|---------------------------|---|
| No-load speed             | 0 rpm   |
| No-load speed (1st level) | 0 rpm   |
| No-load speed (2nd level) | 0-2,300 rpm   |
| No-load speed (3rd level) | 0-3,400 rpm   |
| Torque settings           | 3   |
| Weight excl. battery      | 1.2 kg  |
| Torque, max.              | 200 Nm  |
| Impact rate               | 0-4,000 bpm   |
| Impact rate (1st level)   | 0-2,300 bpm   |
| Impact rate (2nd level)   | 0-3,400 bpm   |
| Impact rate (3rd level)   | 0-4,000 bpm   |
| Tool holder               | 1/2" Square 1/4" Hex Uni  |
| Tool dimensions (width)   | 70 mm   |
| Tool dimensions (length)  | 147 mm  |
| Tool dimensions (height)  | 208 mm  |
| Battery voltage           | 18.0 V  |
| Noise level               | The A-rated noise level of the power tool is typically as follows: Sound pressure level 95 dB(A); Sound power level 106 dB(A). Uncertainty K= 3 dB. |

### Screw diameter

|                |            |
|----------------|------------|
| Screw diameter | M 6 – M 16 |
|----------------|------------|

### Segment

|                 |  |
|-----------------|--|
| Segments        | Heavy Duty Range Cordless Impact Drivers |
| Mailing segment | Metal Stone Wood                         |

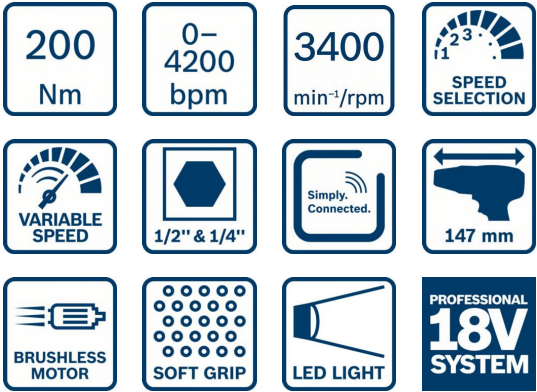

## Sales information

---

### Positioning

- High power in compact size

### User benefit

- Ready for all applications, thanks to 2 in 1 bit holder: ¼" internal hex and ½" square drive
- Powerful use even in hard to reach areas thanks to best head length to torque ratio
- Bluetooth Connectivity module for tool feedback, soft start and service information via mobile device